春天，衝刺 腳踏燈系統

Spring, Primavera rear footpegs light system

銅猴子
COPPER MONKEY

01

產品介紹

Product introduction

01-1

產品特色

Product features

VESPA 春天/衝刺 腳踏燈組產品特色 Spring, Primavera rear footpegs light system product features

#VESPA 春天/衝刺 車型皆可安裝 Spring, Primavera can be installed on all models

#特殊防水材料 Special waterproof material

#呼吸照地燈,方向燈,煞車燈融為一體的設計 Breathing ground light, direct light, and brake light are integrated into one design

#增加夜間行車安全 Increase driving safety at night

#接線模組化安裝簡單 Simple modular wiring installation

#不會影響原廠電路系統 Will does not affect the original circuit system

#台灣製造 Made in Taiwan

Package Contents

❶包裝盒 Packing box

❷腳踏燈模組 Foot lamp module

❸連接線組 Connecting line group

❹品牌貼紙 Brand stickers

❺保固卡 Warranty Card



Control module

❶前方向燈連接頭 Front turn signal connector

❷前方向燈連接頭 Front turn signal connector

❸煞車訊號公接頭 Brake signal male pin connector

❹熱縮套管 Thermal casing


❺煞車訊號母接頭 Brake signal male socket connector

❻踏板訊號 Pedal signal

❼踏板訊號 Pedal signal

❽迴路線公接頭 loop wire pin connector

❾迴路線母接頭 loop wire socket connector

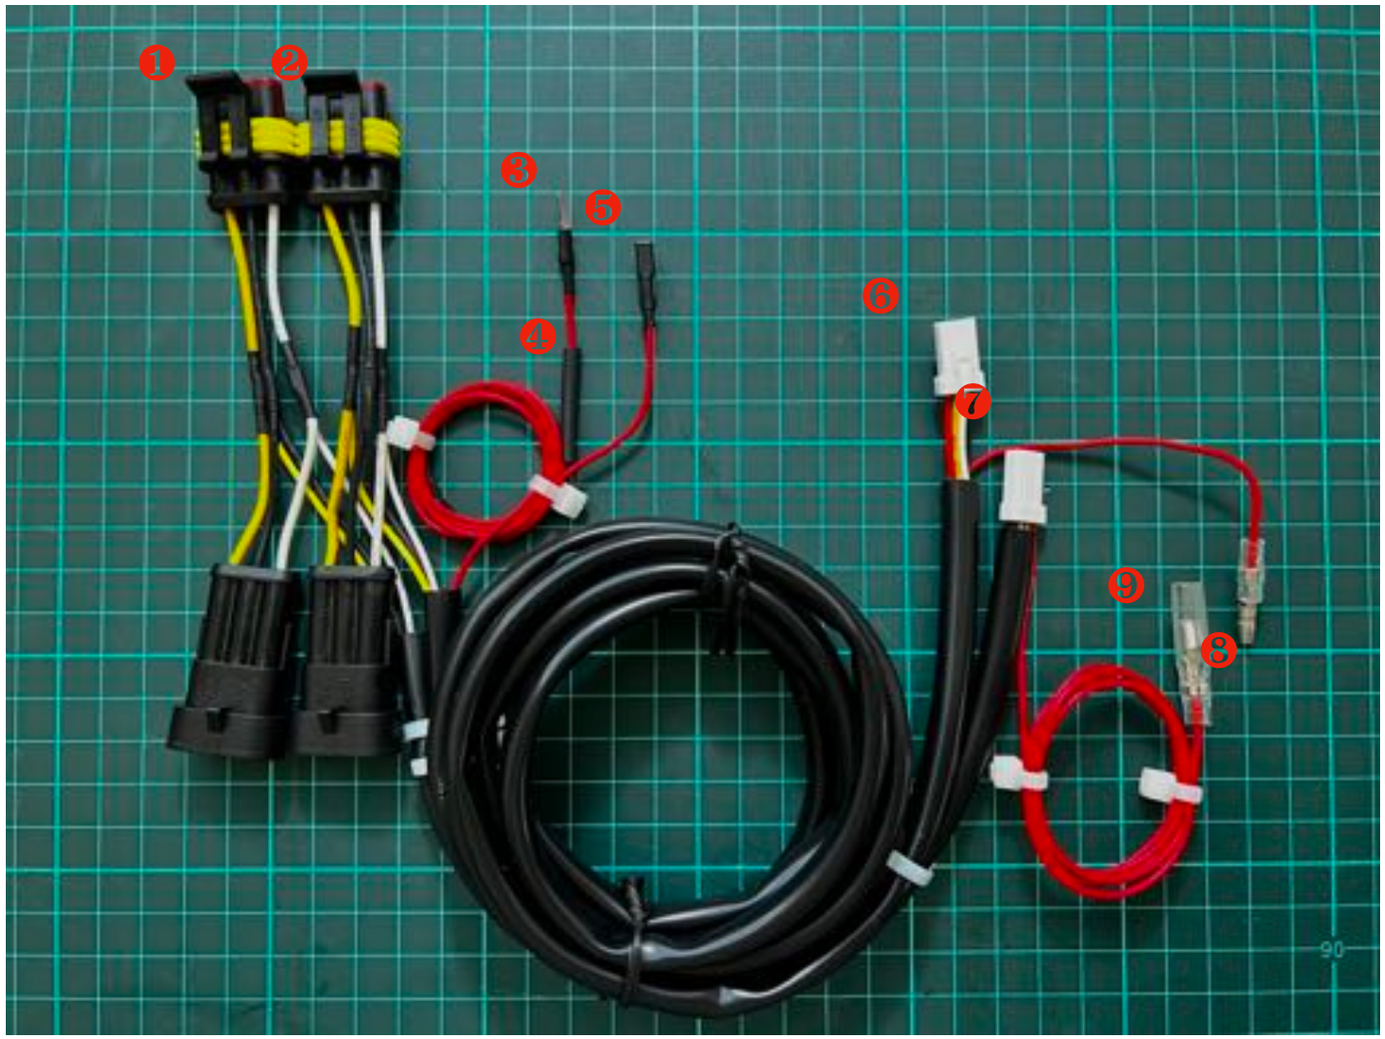


02

安裝注意事項

Installation Precautions


02-1

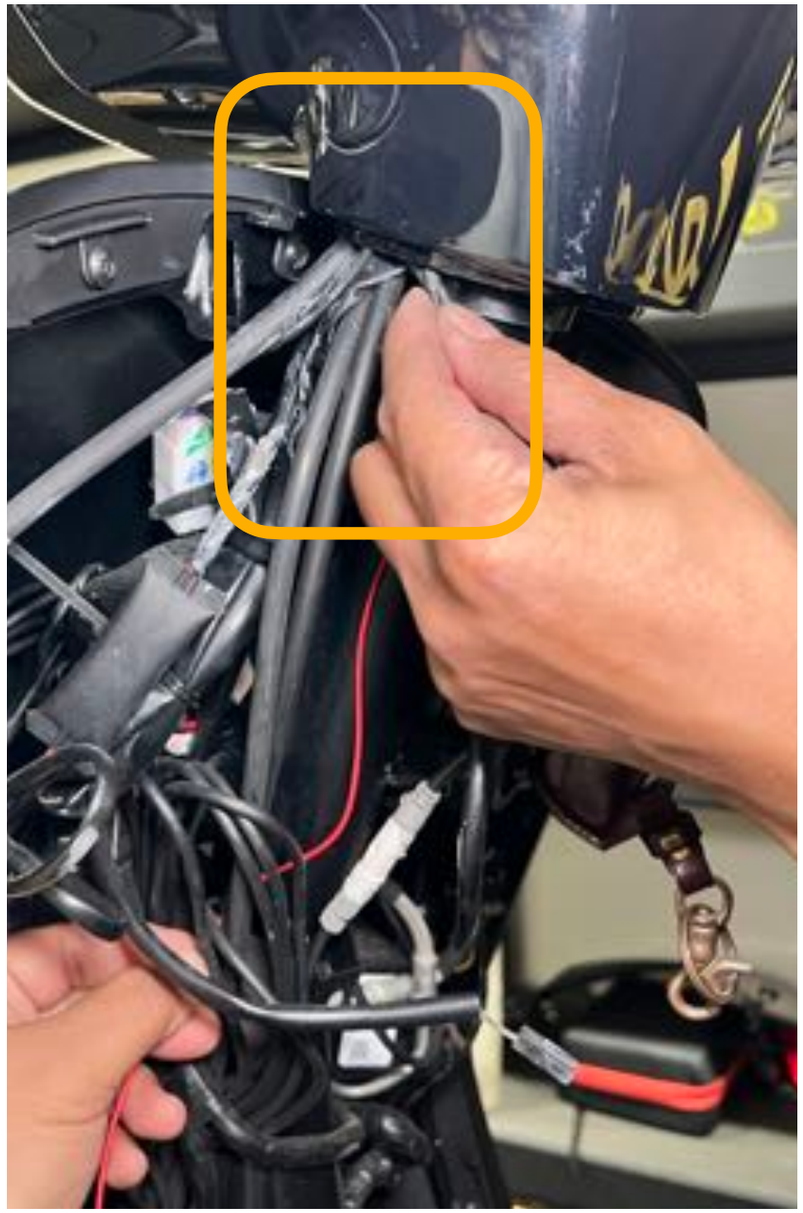

1.牽引煞車訊號線.
Pass through the brake signal line.



2.煞車訊號線.
Brake signal line.

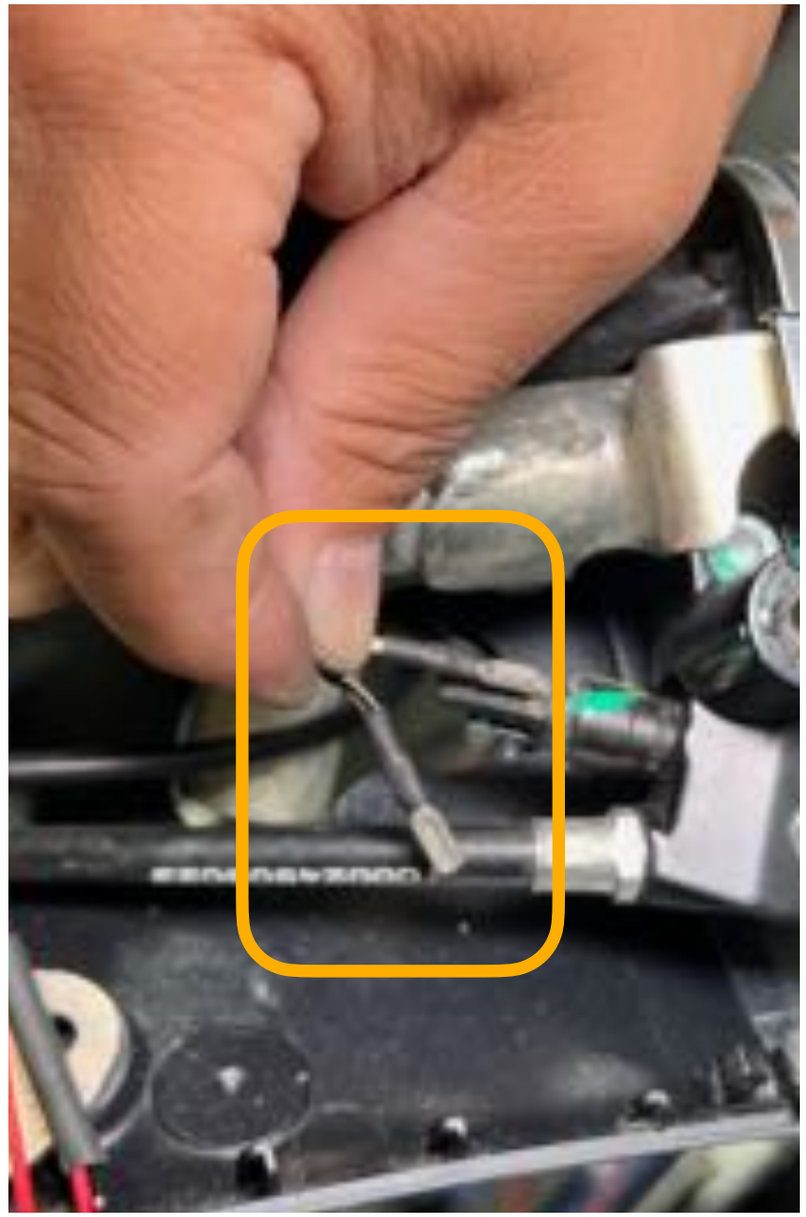

3.拆下原廠煞車訊號線（白線黑條紋）.
Remove the original brake signal cable (white line and black stripe).

02-2




4.連接煞車訊號線公頭端.
Connect the pin end of the brake signal cable.



5.套上保護套,並且使用吹風機或熱風槍熱縮護套.
Put on a protective sleeve and use a hair dryer or heat gun to shrink the sleeve.



6.將另一段煞車訊號線母端,接上車體煞車開關.
Connect the socket end of the other brake signal cable to the body brake switch.

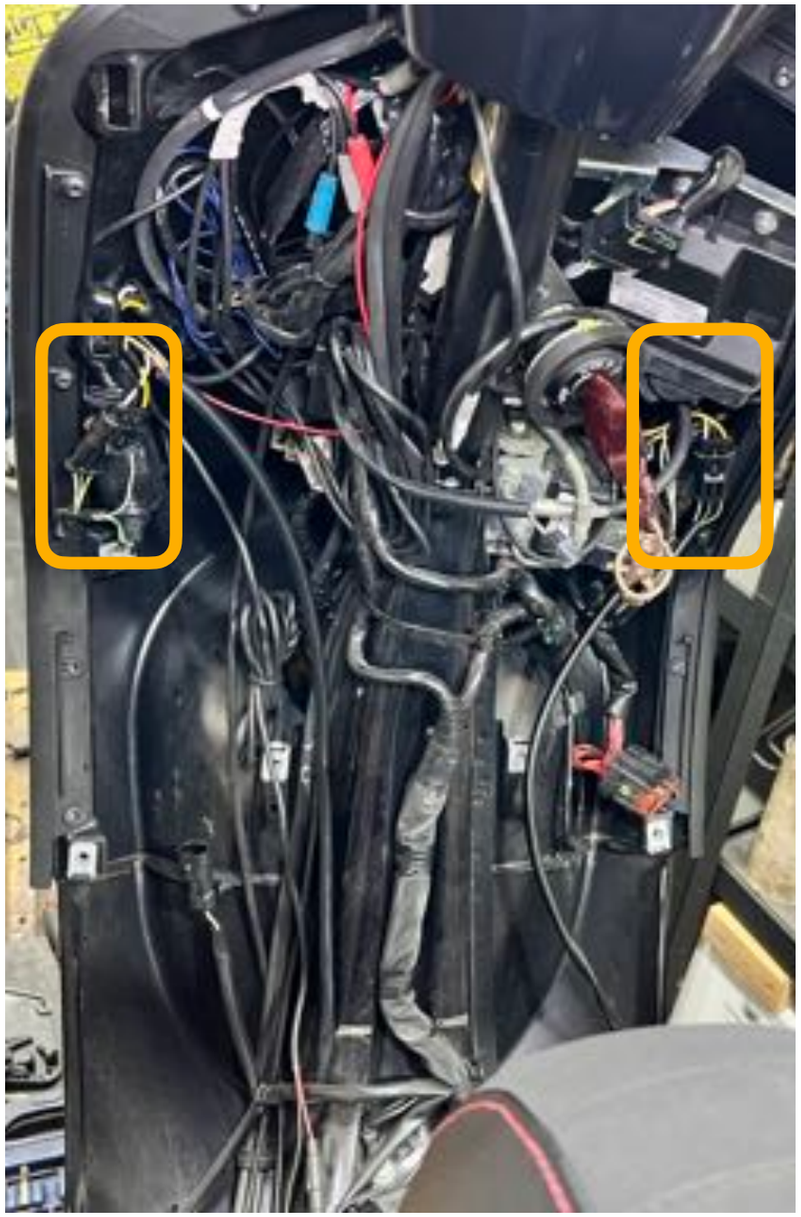


7.拆開左右方向燈接頭.
Disassemble the left and right direction light connectors.



8.接上右側訊號模組.
Connect the right signal module.




9.接上左側訊號模組.
Connect the left signal module.

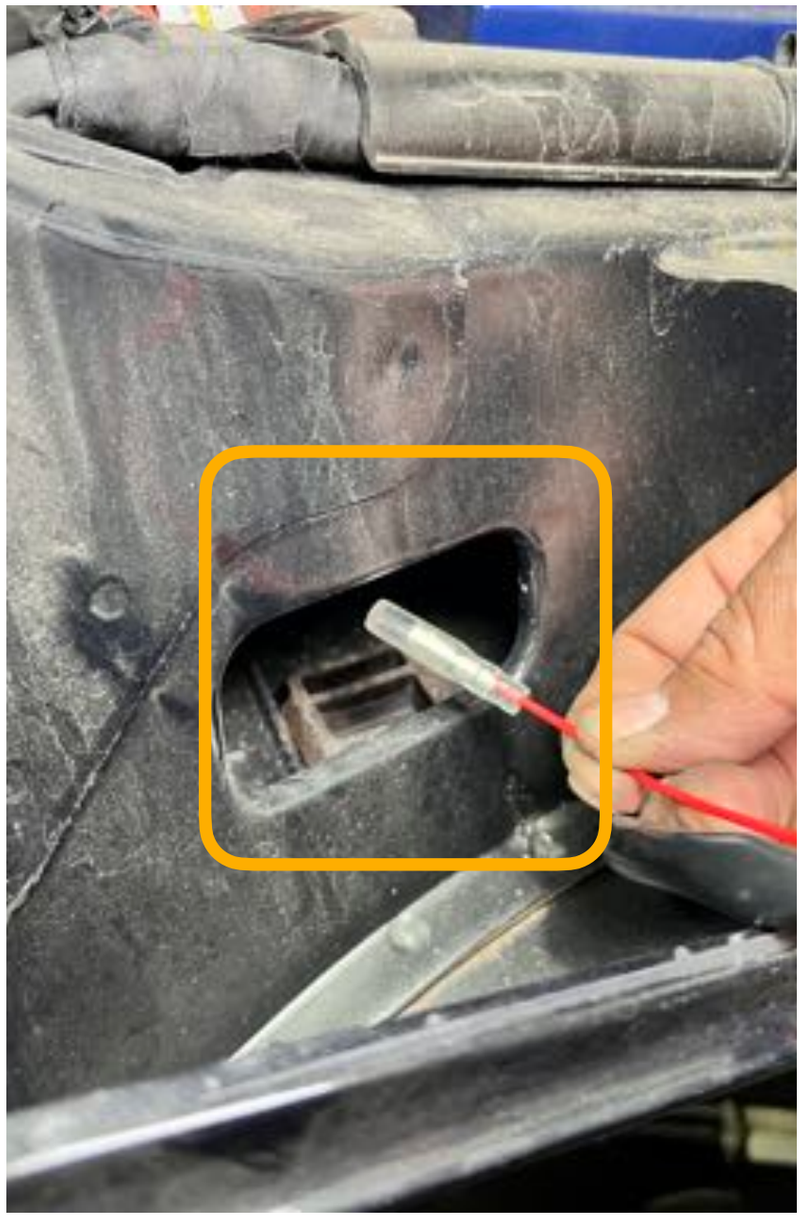

10.將長端紅色迴路線穿過踏板座.
Pass the long red loop wire through the pedal seat.




11.將長端紅色迴路線從另一端拉出.
Pull out the long red loop wire from the other end.

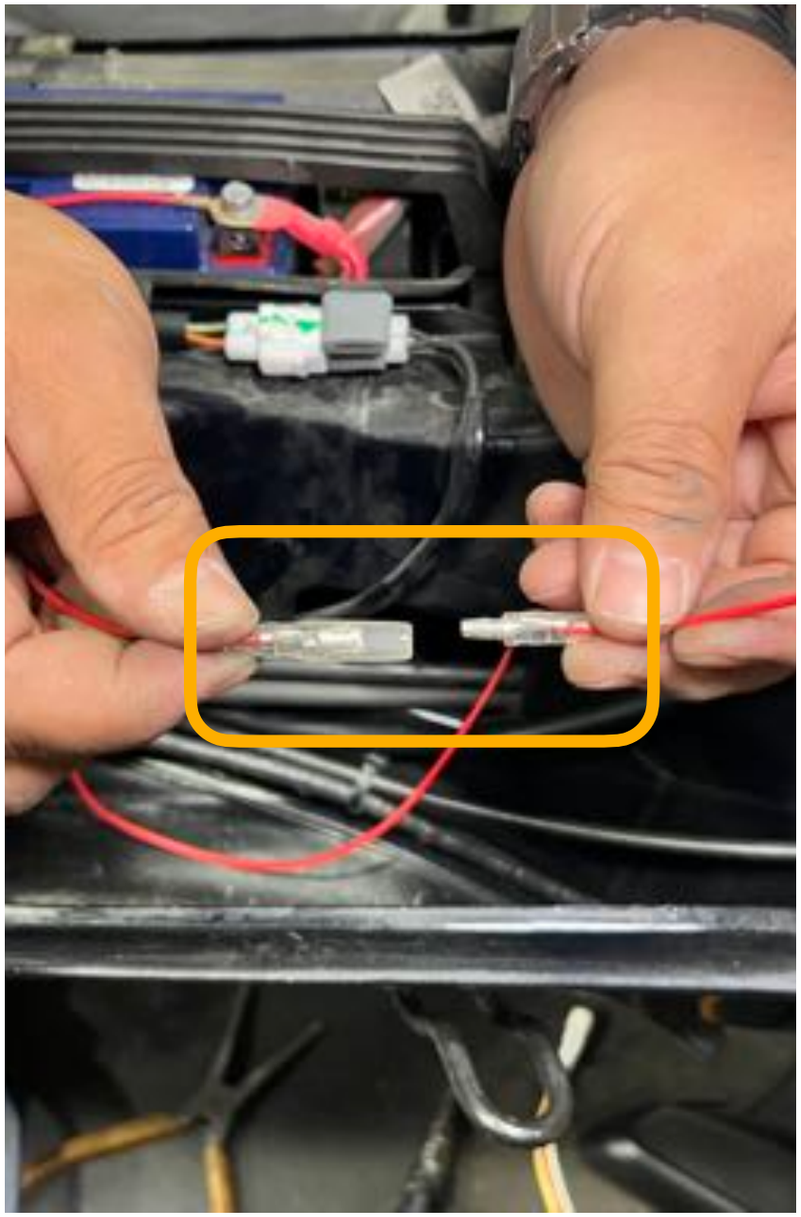


12.連接左右兩側紅色迴路線.
Connect the red loop wires on the left and right sides.



13.左右側踏板座鑽孔定位.
Drilling and positioning of left and right pedal seats.

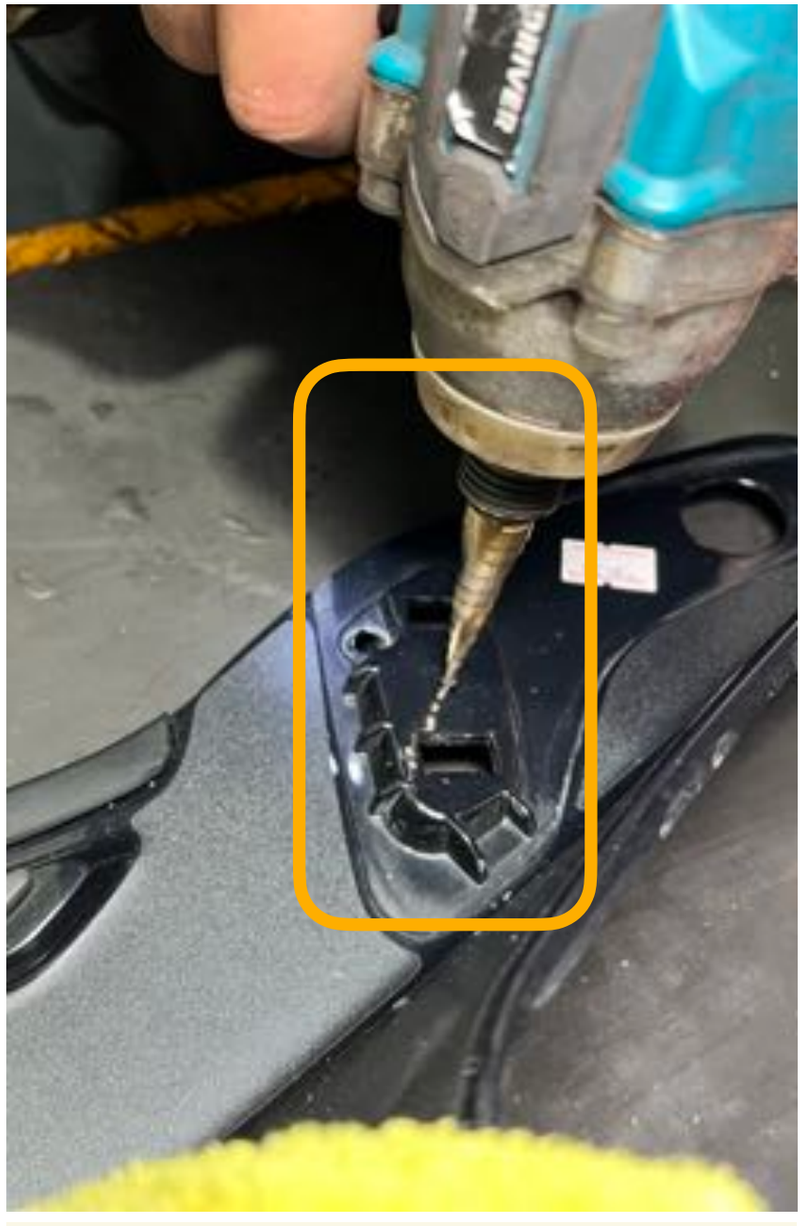

14.鑽出線孔（ϕ13mm).
Drill wire hole (ϕ13mm).

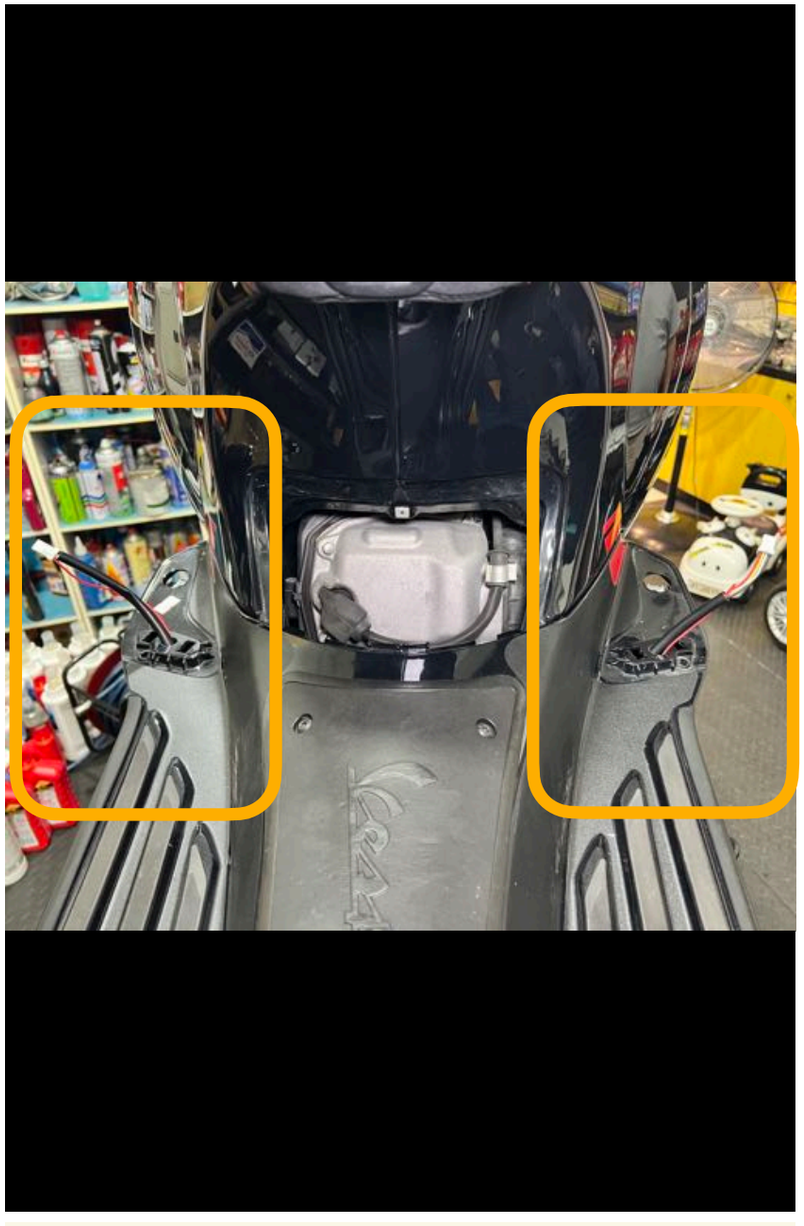


15.穿引左右踏板訊號接頭.
Thread the left and right pedal signal connectors.



16.連接左右邊踏板訊號接頭.
Connect the left and right pedal signal connectors.



17.將接頭塞進踏板座內部.
Tuck the connector into the pedal seat.

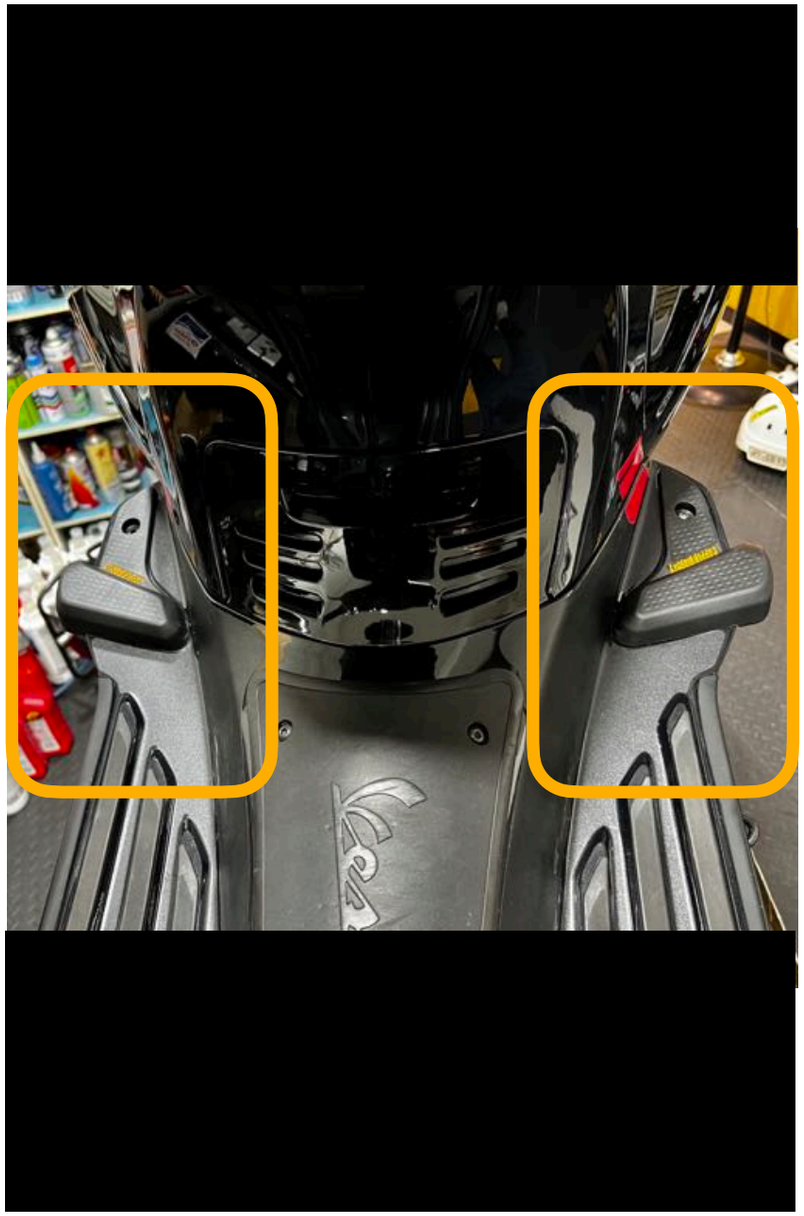

18.將踏板燈安裝置定位,鎖回螺絲.
Position the pedal light installation device and lock the screw back.

03

設定說明

Setting instructions

提醒 Reminder

- 請於電源關閉下進行施工.Please perform construction with the power off.
- 請避免線路過度彎曲.Please avoid cable excessive bending.

04

故障排除

Troubleshooting

04-1

燈號如果無法啟動。If the light cannot be activated.

- 踏板煞車燈沒亮或恆亮,請檢查步驟1~6是否確實?The pedal brake light is off or always-on, please check if steps 1 to 6 are correct?
- 保險絲是否正常？Whether the fuse is normal?
- 接頭是否脫落？Whether the connector falls off?
- 請聯繫我們.Please contact us.